HOW TO INSTALL YOUR HOT BUDDY

ENGLISH
User and installation manual Sunwood Marino

SUNWOOD®
DUTCH DESIGN

MANUFACTURER

Sunwood® Dutch Design
Christiaan Huygensstraat 10
2665 KX Bleiswijk
The Netherlands

CONTACT DETAILS

sales@sunwood.nl
+31 (0)10 521 1325
www.sunwood.eu

SUNWOOD MARINO
SPECIFICATIONS

Model	Marino
Version	Propane
Country of destination	Netherlands (NL)
PIN number (CE)	0063CM3866
Gas category	I3P
Gas type	G31
Injector	1.1 mm
Pressure	30 mbar
Nominal heat input	5.02 kW

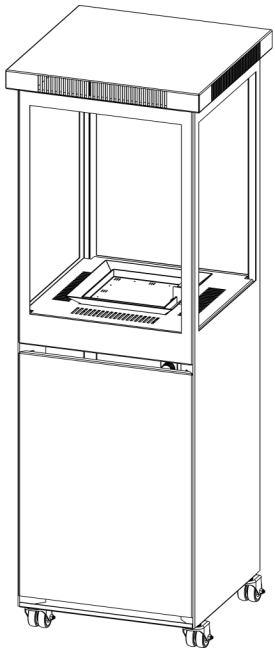

CE **0063**
CERTIFIED BY KIWA

INSTALLATION MANUAL

Please note: consult your dealer if you need help connecting the fireplace.

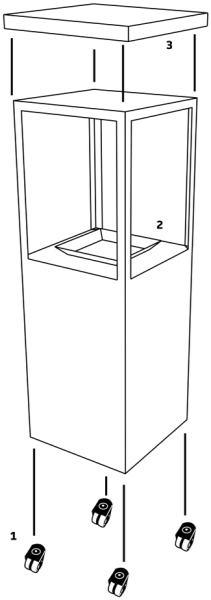



STEP 1 Fit the wheels if desired. The correct assembly order, working up from the underside, is: Bolt – Wheel – Marino – Washer – Spring washer – Nut. Use the supplied spanner to tighten.



STEP 2 Spread the supplied stones evenly over the burner bed. Make sure no fine stone dust gets into the burner.



STEP 3 Fit the top of the Marino with the supplied screws, using a Phillips screwdriver (not supplied).



Connection may vary

STEP 4 Connect the pressure regulator (30 mbar) to the gas cylinder (maximum permitted filling 10.5 kg) using a well-fitting (adjustable) spanner. Hand-tightening is not sufficient and will cause leaks, which can lead to potentially very dangerous situations. Only change the gas cylinder in a well-ventilated area, away from candles, cigarettes and other sources of ignition.

STEP 5 Always keep the gas cylinder upright. Do not let the gas hose come into contact with sharp objects or edges that could damage it. Make sure the hose is not kinked.

STEP 6 Check all connections for leaks by wetting all gas connections with soapy water or leak detection spray. If bubbles form in the soapy water or leak detection spray, there is a leak.

⚠ WARNING

Check the gas hose at least once a month and every time you change the gas cylinder. If the hose shows signs of cracks, splits or other damage, it must be replaced with a hose of the same length and quality.

OPERATING INSTRUCTIONS

You operate the Marino with the gas control unit, which is located behind the door of the fireplace.

► SWITCHING ON

STEP 1 Press the control knob in and turn it anticlockwise to the ignition position. You will hear a click: this is the spark igniting the pilot flame.

STEP 2 Once the pilot flame is lit, keep the control knob pressed in for another 10 seconds. Then release the knob and turn it anticlockwise to fully open.

STEP 3 If the pilot flame goes out: repeat steps 1 and 2 until the pilot flame stays lit.

► ADJUSTING THE FLAME HEIGHT

STEP 1 Set the height of the flame by turning the flame height knob in the right direction.

STEP 2 Turn the knob clockwise for a lower setting.

STEP 3 Turn the knob anticlockwise for a higher setting.

► SWITCHING OFF

Switch off the fireplace by turning the control knob back to the position shown in the illustration.

⚠ WARNING – IF YOU SMELL GAS

Do not light the appliance if you smell gas. If the appliance is burning while you smell gas, shut off the gas supply (gas cylinder or gas tap). Then check all connections for leaks. You can do this by wetting all gas connections with soapy water or leak detection spray. If bubbles form in the soapy water or leak detection spray, there is a leak. The appliance may only be used once all leaks have been fixed. Consult your dealer if necessary.

⚠ WARNING

Check the gas hose at least once a month and every time you change the gas cylinder. If the hose shows signs of cracks, splits or other damage, it must be replaced with a hose of the same length and quality.

OPERATING INSTRUCTIONS

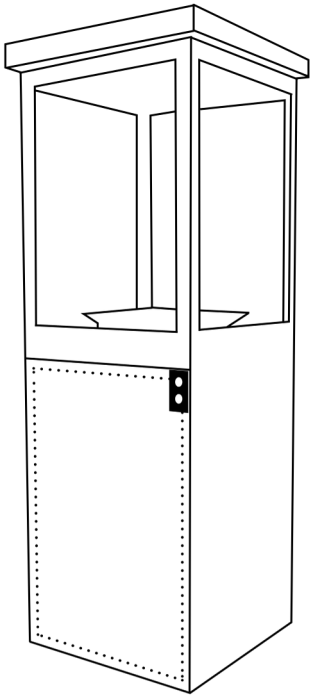



SWITCHING ON



ADJUSTING FLAME HEIGHT

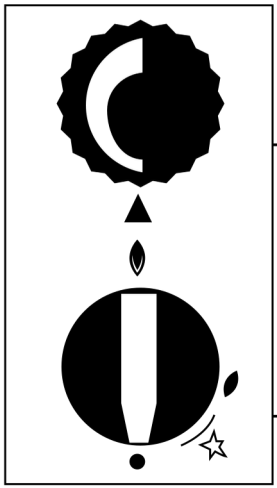

GAS CONTROL UNIT



SWITCHING OFF

WARRANTY TERMS

The warranty period for the Sunwood Marino is 1 year from the invoice date. If a malfunction occurs within the warranty period as a result of a material or manufacturing defect, the defective equipment or part will be repaired or replaced by Sunwood. If a defect is not remedied, Sunwood may offer appropriate compensation. Sunwood alone decides whether a defect is remedied by replacement, repair or compensation.

To be able to claim under the warranty, the instructions in this manual must have been followed correctly and the product must have been used normally. In addition, it is an explicit condition that the product has only been used in the country of destination stated in this manual and on the product sticker.

The warranty does not apply if the defect is the result of normal wear and tear, or if the damage was caused by improper use, intent or recklessness.

A warranty claim can only be made on presentation of the original invoice. Only the original purchaser can claim under the warranty. Claims must be submitted to the dealer from whom the product was originally purchased.

A warranty claim must always be assessed by Sunwood first. The warranty never automatically covers the cost of shipping defective products or parts to the Sunwood factory or the relevant dealer. The same applies to the return shipment of replacement or repaired products. The repair itself is free of charge within the warranty period.

MAINTENANCE INSTRUCTIONS

Good maintenance considerably improves the quality and lifespan of the Marino. We recommend using the weatherproof cover (available as an option) for optimal protection. It keeps the fireplace clean and ready for use at all times. Make sure the fireplace has cooled down completely before putting the cover on the Marino. If you will not be using the Marino for a longer period, we recommend storing it indoors.

Despite the high-quality finish and the use of high-quality materials, the climate affects the quality of the Marino. Keep the Marino in top condition by protecting it as much as possible from the weather, such as the sun.

The fireplace has a UV-resistant outdoor coating. This does not mean that the fireplace is fully UV-proof. To prevent discolouration, place the fireplace out of direct sunlight, at least when it is not in use. This also helps prevent discolouration of the cover.

Clean the Marino with a damp cloth and a normal all-purpose cleaner. Avoid abrasive and aggressive cleaning agents and microfibre cloths. Microfibre cloths owe their cleaning power to the abrasive effect of the microfibres.

Remove the roof to clean the inside of the Marino. You can then slide the glass panels upwards out of the housing to clean the inside thoroughly.

Replace the gas hose every 2 years and the pressure regulator every 5 years. Make sure they comply with all applicable national and regional regulations. The pressure regulator must deliver the pressure stated in the specifications at the beginning of this manual. The use of an adjustable pressure regulator is not permitted.

WARNINGS

Read this manual carefully before using the Sunwood Marino and keep it in a safe place.

- This product and, where applicable, the gas cylinder must be installed in accordance with the instructions in this manual and all applicable national and/or local regulations.
- The distance between highly flammable materials and the fireplace must be at least 1.5 metres.
- Never leave the fire unattended.
- Do not move the Sunwood Marino while it is in use.
- Keep the product out of the reach of children while it is in use and until it has cooled down completely.
- Always turn off the gas before moving the product.
- Never carry out repairs yourself and never modify the product.
- Never obstruct the airflow to the burner and/or the injector.
- Never obstruct the airflow to the gas cylinder housing.
- In strong winds, always put the appliance on its brakes and/or move it to a sheltered spot to prevent it from tipping over.
- Using this appliance in an enclosed space is dangerous and prohibited! This appliance is intended for outdoor use or for use in a well-ventilated space. A space is only considered well-ventilated if at least 25% of the wall surface is open (see illustration below).

